


RAK
CERAMICS

SURFACE 2.0

MADE IN UNITED ARAB EMIRATES

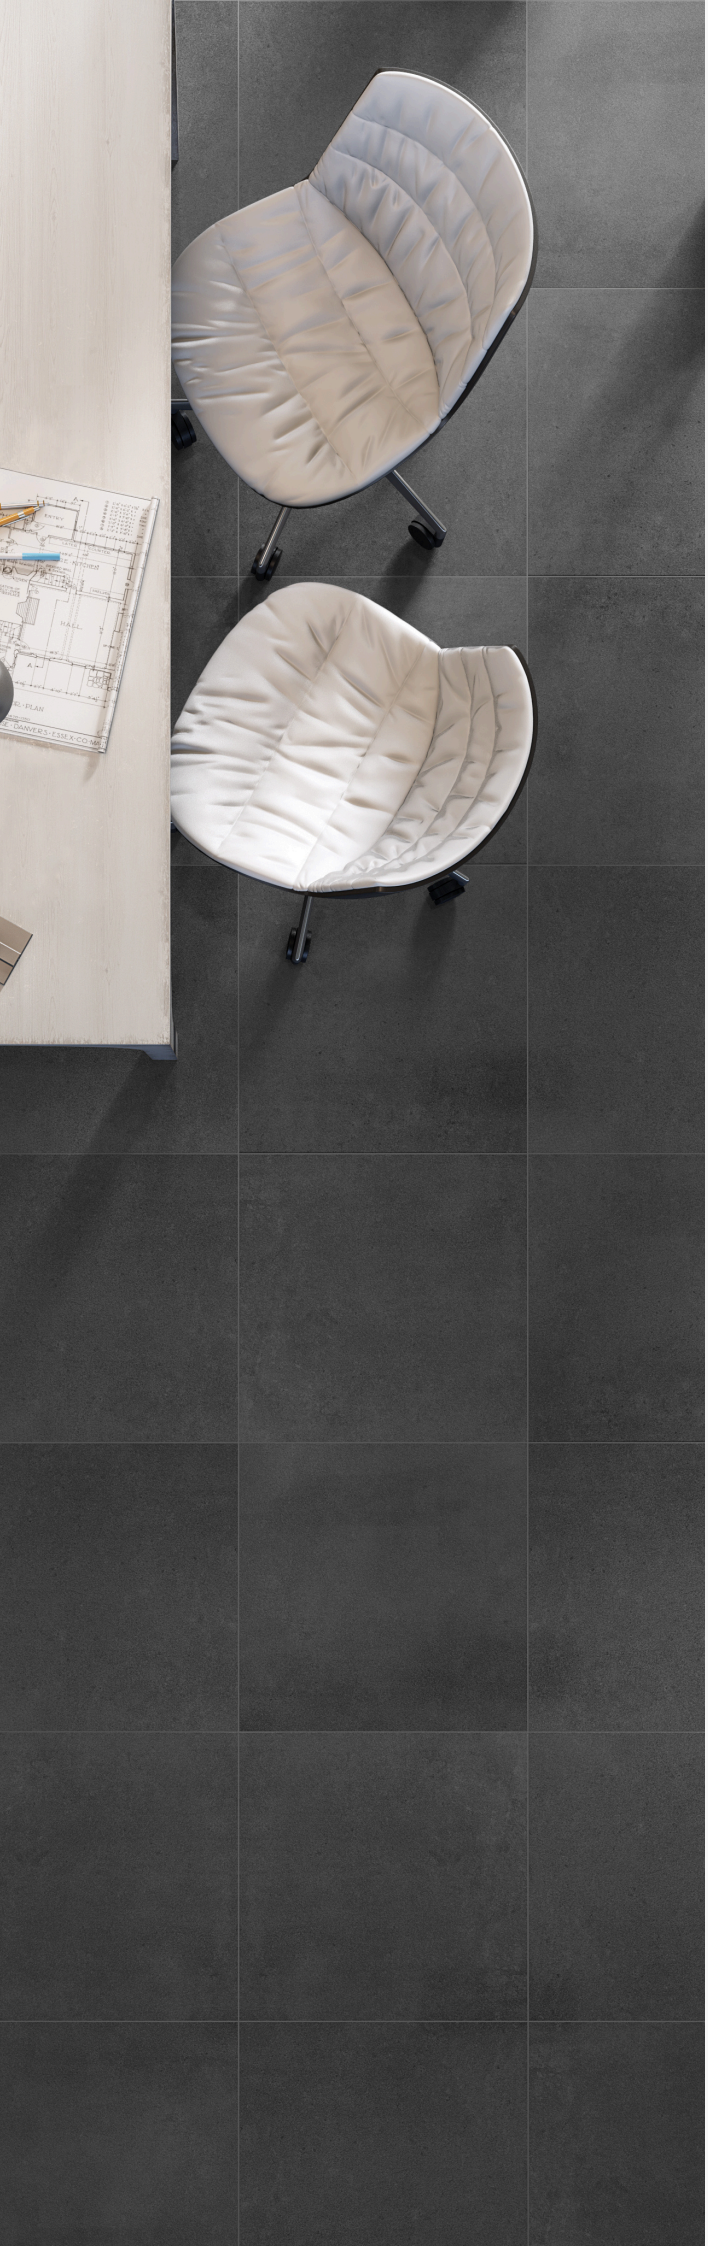

SURFACE 2.0

Emitting brusque vibes of sun baked cement surface's amalgamated tones gracefully adorns the interiors with its crisp texture and is perfectly an architect's delight.

These gres porcellanato tiles are best suited for residencial or commercial applications and available in cut sizes of 600 x 1200, 600 x 600, 300 x 600, 300 x 300 mm in four warm colours and three finishes.

RAK
CERAMICS

SURFACE 2.0

03 COOL GREY

04 NIGHT

05 OFF WHITE

06 SAND

07 TECHNICAL INFORMATION

P/T PORCELAIN TILE

RECTIFIED

HS HEAVY STRUCTURE

N NATURAL

V2 LIGHT

M MATTE

E EXTERNAL

L LAPPATO

EXTERNAL 2CM

WALL TILES

FLOOR TILES

DOMESTIC PURPOSE

LIGHT COMMERCIAL TRAFFIC AREA

RAK CERAMICS

PORCELAIN

Surface 2.0

COOL GREY

CONTEMPORARY SURFACES FOR A MORE CONSCIOUS TOMORROW

A timeless appeal of stone and the performance of porcelain. Cool Grey brings a refined concrete aesthetic and balanced tone, creating a versatile, modern space with understated sophistication.



NATURAL LOOK.
HIGHER POSSIBILITIES

P/T | HS | N | M | E | L



TECHNICAL SPECIFICATIONS

SIZE	FINISH	m²/SHEET	PCS/CTN	CTN/PALLET	m²/PALLET	KGS/PALLET	P RATING	FACES
300x300mm	External & Matte P3	0.18	6	48	51.84	1152	P3	24
300x600mm	External, Lappato & Matte P3	0.18	6	48	51.84	1152	P3	24
600x600mm	External, Lappato & Matte P3	0.36	4	30	42.6	915	P4	24
600x600mm	Ext. 2cm	0.36	4	30	42.6	915	P5	24

RAK CERAMICS

PORCELAIN

Surface 2.0

COOL GREY

BOLD SURFACES FOR TIMELESS SPACES.

Bringing depth, sophistication and modern character to architectural interiors. Its rich charcoal tone and refined stone-like texture create a bold yet versatile foundation, ideal for contemporary residential and commercial settings. The result is a surface that feels grounded, elegant and enduring.

BEAUTY THAT ENDURES



P/T | HS | N | M | E | L



TECHNICAL SPECIFICATIONS

SIZE	FINISH	m²/SHEET	PCS/CTN	CTN/PALLET	m²/PALLET	KGS/PALLET	P RATING	FACES
300x300mm	External & Matte P3	0.18	6	48	51.84	1152	P3	24
300x600mm	External, Lappato & Matte P3	0.18	6	48	51.84	1152	P3	24
600x600mm	External, Lappato & Matte P3	0.36	4	30	42.6	915	P4	24

RAK
CERAMICS

PORCELAIN

Surface 2.0

OFF WHITE

SOFT NEUTRAL SURFACES
FOR TIMELESS SPACES.

Create a calm and understated foundation for contemporary interior applications. The warm off-white tone softens the space while maintaining a clean feel. With a refined stone-inspired texture and versatile finish options, it brings light, warmth and quiet sophistication to residential and commercial settings.



SOFT TONE
QUIET ELEGANCE
TIMELESS APPEAL



TECHNICAL SPECIFICATIONS

SIZE	FINISH	m²/SHEET	PCS/CTN	CTN/PALLET	m²/PALLET	KGS/PALLET	P RATING	FACES
300x300mm	External & Matte P3	0.18	6	48	51.84	1152	P3	24
300x600mm	External, Lappato & Matte P3	0.18	6	48	51.84	1152	P3	24
600x600mm	External, Lappato & Matte P3	0.36	4	30	42.6	915	P4	24

RAK CERAMICS

PORCELAIN

Surface 2.0

SAND

WARM NEUTRAL SURFACES
FOR TIMELESS SPACES

A warm sandy tone bringing natural comfort and understated elegance, creating a soft, grounded foundation for contemporary interiors and exterior applications. With its refined stone-spired texture and durable finish options, this colour is ideal for setting a warm, balanced and enduring style to the space.

SOFT WARMTH
NATURAL BALANCE
TIMELESS APPEAL



P/T | HS | N | M | E | L



TECHNICAL SPECIFICATIONS

SIZE	FINISH	m²/SHEET	PCS/CTN	CTN/PALLET	m²/PALLET	KGS/PALLET	P RATING	FACES
300x300mm	External & Matte P3	0.18	6	48	51.84	1152	P3	24
300x600mm	External, Lappato & Matte P3	0.18	6	48	51.84	1152	P3	24
600x600mm	External, Lappato & Matte P3	0.36	4	30	42.6	915	P4	24
600x600mm	Ext. 2cm	0.36	4	30	42.6	915	P5	24

TECHNICAL CHARACTERISTICS | PORCELAIN TILES

Test Description	Standard Test Method	ISO 13006 Standard	(Rectified)	(Unrectified)
Length & Width	BS EN ISO 10545-2	±- 0.6%	±- 0.1%	±- 0.3%
Thickness	BS EN ISO 10545-2	± -5.0%	± -5.0%	± -5.0%
Rectangle Squareness	BS EN ISO 10545-2	± -0.5%	± -0.2%	± -0.4%
Straightness of sides	BS EN ISO 10545-2	± -0.5%	± -0.2%	± -0.3%
Surface Flatness	BS EN ISO 10545-2	± -0.5%	± -0.3%	± -0.3%
Water Absorption	BS EN ISO 10545-3	<=0.5%	<=0.4%	<=0.4%
Modulus of Rupture	BS EN ISO 10545-4	>=35 N/mm²	>=40 N/mm²	>=40 N/mm²
Breaking Strength	BS EN ISO 10545-4	>=1300 N	>=1600 N	>=1600 N
Resistance to surface abrasion	BS EN ISO 10545-7	Manufacturer to state Abrasion Class	PEI Class 2-5	PEI Class 2-5
Linear Thermal Expansion	BS EN ISO 10545-8	<=$9x10^{-6}°C^{-1}$	<=$7x10^{-6}°C^{-1}$	<=$7x10^{-6}°C^{-1}$
Resistance to Thermal Shock	BS EN ISO 10545-9	No visible defect	No visible defect	No visible defect
Crazing Resistance	BS EN ISO 10545-11	No crazing	No crazing	No crazing
Frost Resistance	BS EN ISO 10545-12	No visible defect	No visible defect	No visible defect
Resistance to chemicals	BS EN ISO 10545-13	No visible defect	No visible defect	No visible defect
Resistance to stains	BS EN ISO 10545-14	Manufacturer to state Class	Stain removed Min.Class 4	Stain removed Min.Class 4
Colour Resistance to UV Light	DIN 51094	No change in colour	No change in colour	No change in colour

NOTE: Shade variation across the batches is inherent to the manufacturing process and the pre-laying colour comparison is recommended.



PORCELAIN | SURFACE 2.0

Night External 2cm

RAK
CERAMICS

P.O. Box 4714, Ras Al Khaimah,
United Arab Emirates (U.A.E.)

TEL: +971 7 2467000
FAX: +971 7 2445270
EMAIL: info@rakceramics.com

rakceramics.com

EXCLUSIVELY DISTRIBUTED BY:

STONE & CERAMIC
TILE WHOLESALERS